

## VULCAN ENDURANCE™ SERIES



# 36" GAS RESTAURANT RANGE

## 6 OPEN BURNERS



Model G36S-6 shown with optional casters

- ☐ **G36S-6** 1 Standard Oven
- ☐ **G36C-6** 1 Convection Oven
- ☐ **G36B-6** 1 Storage Base

### STANDARD FEATURES

- Fully MIG welded frame
- Stainless steel front, sides, backriser, lift-off high shelf
- 6" Stainless steel adjustable legs
- 32,000 BTU/hr open top burners with lift-off heads
- Individual pilot for each burner
- Heavy duty cast grates, easy lift-off 12" x 12 1/2" in front and 12" x 14 1/2" in the rear
- Extra deep pull out crumb tray with welded corners
- 35,000 BTU/hr baker's depth standard oven cavity. Full size sheet pans fit side-to-side or front-to-back
- Oven thermostat adjusts from 250°F to 500°F
- Heavy duty cool touch oven door handle
- Two oven racks and four rack positions
- 35,000 BTU/hr Snorkler convection oven in place of standard oven 26"d x 26 1/8"w x 13 7/8"h (115v - 1 phase blower motor 4 amp, 6' cord and plug), includes three oven racks
- One year limited parts and labor warranty

### SPECIFICATIONS

36" wide gas restaurant range, Vulcan Model No. G36S-6. Fully MIG welded aluminized steel frame for added durability. Stainless steel front, sides, backriser, high shelf and 6" adjustable legs. Extra deep crumb tray with welded corners. Six 32,000 BTU/hr cast burners with lift-off burner heads. Individual pilot for each burner. Heavy duty cast grates, easy lift-off 12" x 12 1/2" in the front and 12" x 14 1/2" in the back to better accommodate stock pots or large pans. Grates have a built in aeration bowl for greater efficiency. Burner knobs and oven handle are cool to the touch, high temperature material. One oven: 35,000 BTU/hr standard bakers depth ovens with porcelain oven bottom, sides and door panel, measures 26 1/2"d x 26 3/8"w x 14"h. Oven thermostat adjusts from 250°F to 500°F with low setting. Oven is supplied with two racks, two rack guide sets, and four rack positions. Oven door is heavy duty with an integrated door hinge/spring mechanism requiring no adjustment. 3/4" rear gas connection and pressure regulator. Total input 227,000 BTU/hr.

#### Exterior Dimensions:

35 3/8"d x 36"w x 58"h on 6" adjustable legs

### OPTIONAL FEATURES (Factory Installed)

- ☐ Rapid clean system - stainless steel clean-out basin, quick disconnect burners, gas shut-off valve
- ☐ Front mounted gas shut-off valve turns off top burner pilots
- ☐ 6" stainless steel stub back
- ☐ Reinforced high shelf for mounting salamander broiler
- ☐ Hot top section in lieu of one open burner

### ACCESSORIES (Packaged & Sold Separately)

- ☐ Extra oven rack
- ☐ Extra rack guides (set of two)
- ☐ Casters (set of four)
- ☐ Flanged feet (set of four)
- ☐ Reinforced high shelf for mounting salamander broiler



**Vulcan & Wolf Range**

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602



## 36" GAS RESTAURANT RANGE

### 6 OPEN BURNERS


#### INSTALLATION INSTRUCTIONS

1. A pressure regulator sized for this unit is included.  
Natural gas 5.0" W.C., propane gas 10.0" W.C.
2. Gas line connecting to range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger.
3. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.
4. These units are manufactured for installation in accordance with ANSI Z223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.
5. **Clearances**

	Rear	Sides
Combustible	6"	10"
Standard Oven Non-combustible	0"	0"
Convection Oven Non-combustible	Min. 4"	0"
6. For proper combustion, install equipment on adjustable legs or casters provided with unit.
7. For proper combustion, install equipment on adjustable legs or casters provided with unit.

**NOTE:** In line with its policy to continually improve its product, Vulcan reserves the right to change materials and specifications without notice.

Specify type of gas when ordering. Specify altitude when above 2,000 feet.

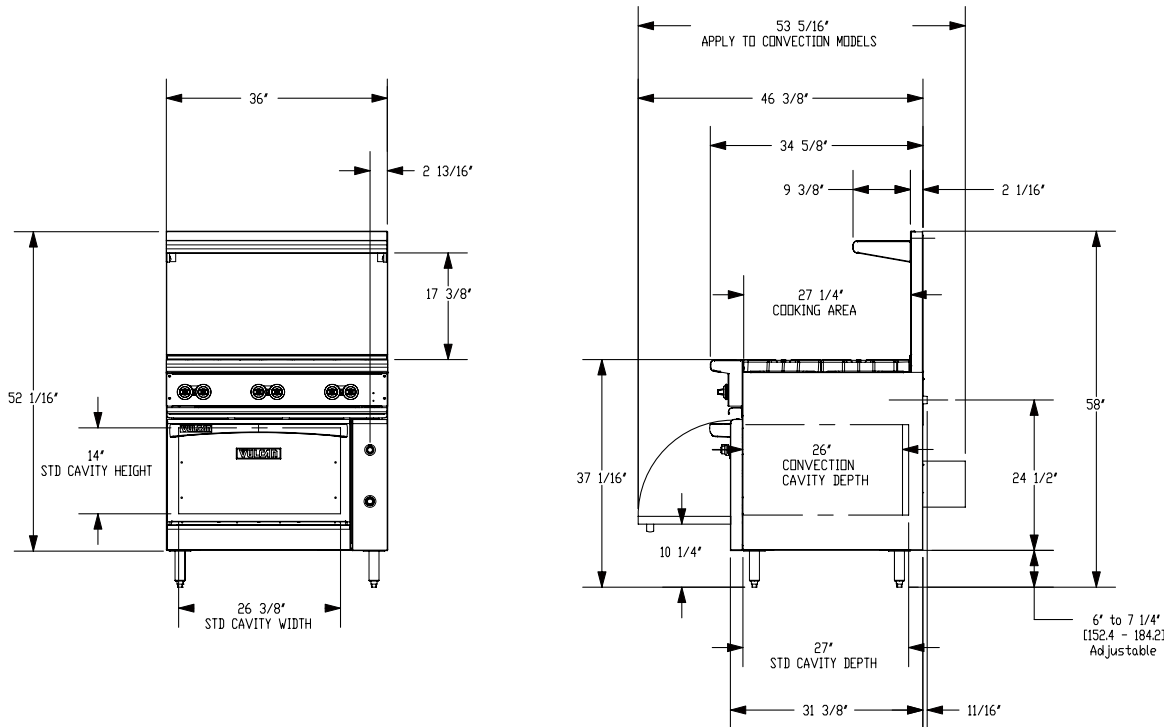

TOP CONFIGURATION	MODEL NUMBER	DESCRIPTION	TOTAL INPUT BTU / HR	SHIPPING WEIGHT LBS / KG
	G36S-6	6 Burners / 1 Standard Oven	227,000	520 / 236
	G36C-6	6 Burners / 1 Convection Oven	227,000	580 / 263
	G36B-6	6 Burners / 1 Storage Base	192,000	490 / 222

*This appliance is manufactured for commercial use only and is not intended for home use.*



**Vulcan & Wolf Range**

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602